

Around View Monitoring System

AVM-FHD4LT(4CH) ***AVM-FHD6LT(6CH)***



Front Side



Back Side




Features

- Heavy Duty AVM 360
- Real Full AVM System
- HD 3D Surround View
- Easy & Fast Auto Calibration
- Input Full HD 4CH Camera (Max 6CH for Long Body vehicle)
- Full HD HDMI Digital output
- USB 2.0A Host (HUB/Mouse/Memory)
- Support 1 Trigger Input (optional upto 5 Triggers)
- CAN interface ready
- Compatible Upto 4EA Radar Sensor

Application

- Heavy duty vehicle
- Construction vehicle
- Agriculture vehicle
- Forklift

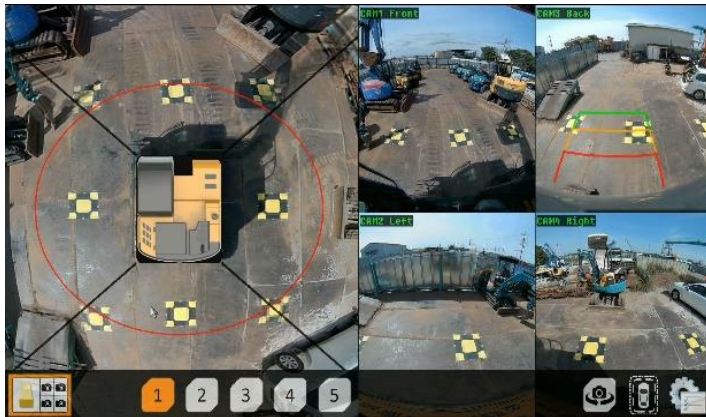

Live display screen



Main menu screen

Around View Monitoring System

Specification	
Operating Voltage	10~32V DC
Current Consumption	2.5A @(12V)
Operating Temp.	-20~+70
Number of Video input	4 Cameras (upto 6 cameras)
Number of Trigger input	1 Trigger (optional upto 5)
TV system	1080P AHD / HDMI
Weight	Approx. 400g
Casing Material	Plastic
Dimension	130mm(H) x 145mm(V) x 43mm(D)
Recording	SSD, USB, SDcard
USB	2.0
CAN port	CAN (upto 4EA Radar sensor)

Dimension

